

Chapter 14: Transactions

Transaction Concept

- A **transaction** is a *unit* of program execution that accesses and possibly updates various data items.
- E.g. transaction to transfer \$50 from account A to account B:
 1. **read**(A)
 2. $A := A - 50$
 3. **write**(A)
 4. **read**(B)
 5. $B := B + 50$
 6. **write**(B)
- Two main issues to deal with:
 - Failures of various kinds, such as hardware failures and system crashes
 - Concurrent execution of multiple transactions

ACID

- Transactions must obey:
 - Atomicity
 - Consistency
 - Isolation
 - Durability
- Key acronym to remember for exams/jobs
- Details...soon

Example of Fund Transfer

- Transaction to transfer \$50 from account A to account B:
 1. **read**(A)
 2. $A := A - 50$
 3. **write**(A)
 4. **read**(B)
 5. $B := B + 50$
 6. **write**(B)
- **Atomicity requirement**
 - if the transaction fails after step 3 and before step 6, money will be “lost” leading to an inconsistent database state
 - Failure could be due to software or hardware
 - the system should ensure that updates of a partially executed transaction are not reflected in the database
- **Durability requirement** — once the user has been notified that the transaction has completed (i.e., the transfer of the \$50 has taken place), the updates to the database by the transaction must persist even if there are software or hardware failures.

Example of Fund Transfer (Cont.)

- Transaction to transfer \$50 from account A to account B:
 1. **read**(A)
 2. $A := A - 50$
 3. **write**(A)
 4. **read**(B)
 5. $B := B + 50$
 6. **write**(B)
- **Consistency requirement** in above example:
 - the sum of A and B is unchanged by the execution of the transaction
- In general, consistency requirements include
 - Explicitly specified integrity constraints such as primary keys and foreign keys
 - Implicit integrity constraints
 - e.g. sum of balances of all accounts, minus sum of loan amounts must equal value of cash-in-hand

Consistency...cont

- A transaction must see a consistent database.
 - During transaction execution the database may be temporarily inconsistent.
 - When the transaction completes successfully the database must be consistent

Example of Fund Transfer (Cont.)

- **Isolation requirement** — if between steps 3 and 6, another transaction T2 is allowed to access the partially updated database, it will see an inconsistent database (the sum $A + B$ will be less than it should be).

T1

T2

1. **read**(A)
2. $A := A - 50$
3. **write**(A)
4. **read**(B)
5. $B := B + 50$
6. **write**(B)

read(A), read(B), print(A+B)

- Isolation can be ensured trivially by running transactions **serially**
 - that is, one after the other.
- However, executing multiple transactions concurrently has significant benefits, as we will see later.


ACID Properties

- **Atomicity.** Either all operations of the transaction are properly reflected in the database or none are.
- **Consistency.** Execution of a transaction in isolation preserves the consistency of the database.
- **Isolation.** Although multiple transactions may execute concurrently, each transaction must be unaware of other concurrently executing transactions. Intermediate transaction results must be hidden from other concurrently executed transactions.
 - That is, for every pair of transactions T_i and T_j , it appears to T_i that either T_j finished execution before T_i started, or T_j started execution after T_i finished.
- **Durability.** After a transaction completes successfully, the changes it has made to the database persist, even if there are system failures.

Transaction State

- **Active** – the initial state; the transaction stays in this state while it is executing
- **Partially committed** – after the final statement has been executed.
- **Failed** – after the discovery that normal execution can no longer proceed.
- **Aborted** – after the transaction has been rolled back and the database restored to its state prior to the start of the transaction. Two options after it has been aborted:
 - restart the transaction
 - can be done only if no internal logical error
 - kill the transaction
- **Committed** – after successful completion.

Transaction State (Cont.)

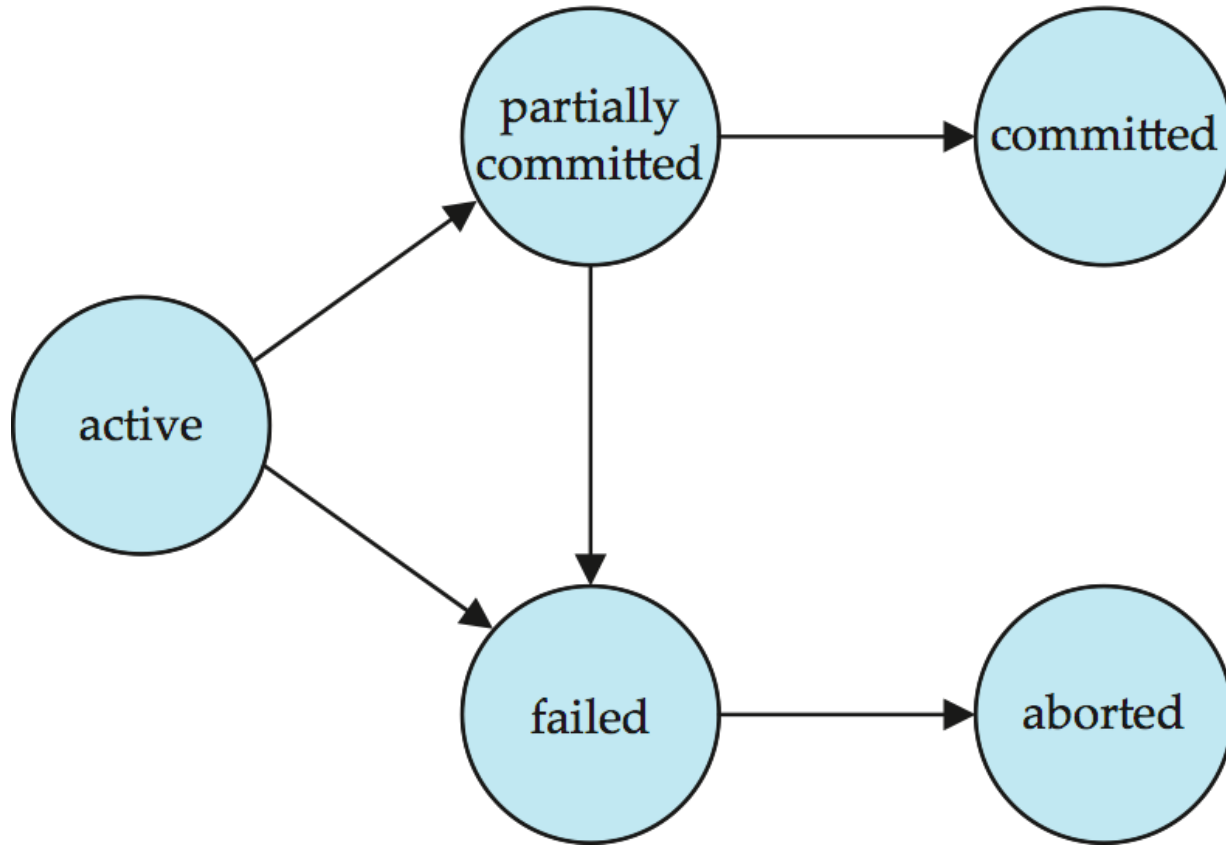

Concurrent Executions

- Multiple transactions are allowed to run concurrently in the system. Advantages are:
 - **increased processor and disk utilization**, leading to better transaction *throughput*
 - E.g. one transaction can be using the CPU while another is reading from or writing to the disk
 - **reduced average response time** for transactions: short transactions need not wait behind long ones.
- **Concurrency control schemes** – mechanisms to achieve isolation
 - that is, to control the interaction among the concurrent transactions in order to prevent them from destroying the consistency of the database

Schedules

- **Schedule** – a sequences of instructions that specify the chronological order in which instructions of concurrent transactions are executed
 - a schedule for a set of transactions must consist of all instructions of those transactions
 - must preserve the order in which the instructions appear in each individual transaction.
- A transaction that successfully completes its execution will have a commit instructions as the last statement
 - by default transaction assumed to execute commit instruction as its last step
- A transaction that fails to successfully complete its execution will have an abort instruction as the last statement

Schedule 1

- Let T_1 transfer \$50 from A to B , and T_2 transfer 10% of the balance from A to B .
- A **serial** schedule in which T_1 is followed by T_2 :

T_1	T_2
read (A) $A := A - 50$ write (A) read (B) $B := B + 50$ write (B) commit	read (A) $temp := A * 0.1$ $A := A - temp$ write (A) read (B) $B := B + temp$ write (B) commit

Schedule 2

- A serial schedule where T_2 is followed by T_1

T_1	T_2
read (A) $A := A - 50$ write (A) read (B) $B := B + 50$ write (B) commit	read (A) $temp := A * 0.1$ $A := A - temp$ write (A) read (B) $B := B + temp$ write (B) commit

Schedule 3

- Let T_1 and T_2 be the transactions defined previously. The following schedule is not a serial schedule, but it is *equivalent* to Schedule 1.

T_1	T_2
read (A) $A := A - 50$ write (A)	
	read (A) $temp := A * 0.1$ $A := A - temp$ write (A)
read (B) $B := B + 50$ write (B) commit	
	read (B) $B := B + temp$ write (B) commit

In Schedules 1, 2 and 3, the sum $A + B$ is preserved.

Schedule 4

- The following concurrent schedule does not preserve the value of $(A + B)$.

T_1	T_2
read (A) $A := A - 50$	
	read (A) $temp := A * 0.1$ $A := A - temp$ write (A) read (B)
write (A) read (B) $B := B + 50$ write (B) commit	
	$B := B + temp$ write (B) commit

Serializability

- **Basic Assumption** – Each transaction preserves database consistency.
- Thus serial execution of a set of transactions preserves database consistency.
- A (possibly concurrent) schedule is serializable if it is equivalent to a serial schedule. Different forms of schedule equivalence give rise to the notions of:
 1. **conflict serializability**
 2. **view serializability**

Simplified view of transactions

- We ignore operations other than **read** and **write** instructions
- We assume that transactions may perform arbitrary computations on data in local buffers in between reads and writes.
- Our simplified schedules consist of only **read** and **write** instructions.

Serializability

- A schedule is called *serializable* if its final effect is the same as that of a *serial schedule*
- Serializability → schedule is fine and does not result in inconsistent database
 - Since serial schedules are fine
- Non-serializable schedules are unlikely to result in consistent databases
- We will ensure serializability
 - Typically relaxed in real high-throughput environments

Serializability

- Not possible to look at all $n!$ serial schedules to check if the effect is the same
 - Instead we ensure serializability by allowing or not allowing certain schedules
- Conflict serializability
- View serializability
- View serializability allows more schedules

Conflicting Instructions

- Instructions I_i and I_j of transactions T_i and T_j respectively, **conflict** if and only if there exists some item Q accessed by both I_i and I_j , and at least one of these instructions wrote Q .
 1. $I_i = \text{read}(Q)$, $I_j = \text{read}(Q)$. I_i and I_j don't conflict.
 2. $I_i = \text{read}(Q)$, $I_j = \text{write}(Q)$. They conflict.
 3. $I_i = \text{write}(Q)$, $I_j = \text{read}(Q)$. They conflict
 4. $I_i = \text{write}(Q)$, $I_j = \text{write}(Q)$. They conflict
- Intuitively, a conflict between I_i and I_j forces a (logical) temporal order between them.
 - If I_i and I_j are consecutive in a schedule and they do not conflict, their results would remain the same even if they had been interchanged in the schedule.

Conflict Serializability

- If a schedule S can be transformed into a schedule S' by a series of swaps of non-conflicting instructions, we say that S and S' are **conflict equivalent**.
- We say that a schedule S is **conflict serializable** if it is conflict equivalent to a serial schedule

Conflict Serializability (Cont.)

- Schedule 3 can be transformed into Schedule 6, a serial schedule where T_2 follows T_1 , by series of swaps of non-conflicting instructions. Therefore Schedule 3 is conflict serializable.

T_1	T_2
read (A) write (A)	read (A) write (A)
read (B) write (B)	read (B) write (B)

Schedule 3

T_1	T_2
read (A) write (A) read (B) write (B)	read (A) write (A) read (B) write (B)

Schedule 6

Conflict Serializability (Cont.)

- Example of a schedule that is not conflict serializable:

T_3	T_4
read (Q)	
write (Q)	write (Q)

- We are unable to swap instructions in the above schedule to obtain either the serial schedule $\langle T_3, T_4 \rangle$, or the serial schedule $\langle T_4, T_3 \rangle$.

View Serializability

- Let S and S' be two schedules with the same set of transactions. S and S' are **view equivalent** if the following three conditions are met, for each data item Q ,
 1. If in schedule S , transaction T_i reads the initial value of Q , then in schedule S' transaction T_i must also read the initial value of Q .
 2. If in schedule S transaction T_i executes **read**(Q), and that value was produced by transaction T_j (if any), then in schedule S' transaction T_i must also read the value of Q that was produced by the same **write**(Q) operation of transaction T_j .
 3. The transaction (if any) that performs the final **write**(Q) operation in schedule S must also perform the final **write**(Q) operation in schedule S' .

As can be seen, view equivalence is also based purely on **reads** and **writes** alone.

View Serializability (Cont.)

- A schedule S is **view serializable** if it is view equivalent to a serial schedule.
- Every conflict serializable schedule is also view serializable.
- Below is a schedule which is view-serializable but *not* conflict serializable.

T_{27}	T_{28}	T_{29}
read (Q)	write (Q)	
write (Q)		write (Q)

- What serial schedule is above equivalent to?
- Every view serializable schedule that is not conflict serializable has **blind writes**.

Other Notions of Serializability


- The schedule below produces same outcome as the serial schedule $\langle T_1, T_5 \rangle$, yet is not conflict equivalent or view equivalent to it.

T_1	T_5
read (A) $A := A - 50$ write (A)	
	read (B) $B := B - 10$ write (B)
read (B) $B := B + 50$ write (B)	
	read (A) $A := A + 10$ write (A)

- Determining such equivalence requires analysis of operations other than read and write.

Testing for Serializability

- Consider some schedule of a set of transactions T_1, T_2, \dots, T_n
- **Precedence graph** — a direct graph where the vertices are the transactions (names).
- We draw an arc from T_i to T_j if the two transaction conflict, and T_i accessed the data item on which the conflict arose earlier.
- We may label the arc by the item that was accessed.
- **Example 1**

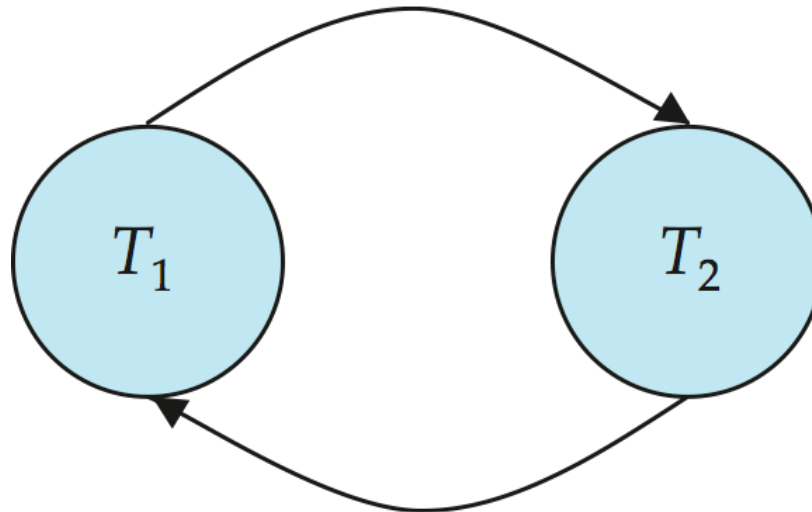


Precedence graph

- Edge $T_i \rightarrow T_j$ exists if one of the following holds:
 - T_i executes **write(Q)** before T_j executes **read(Q)**
 - T_i executes **read(Q)** before T_j executes **write(Q)**
 - T_i executes **write(Q)** before T_j executes **write(Q)**




Example Schedule (Schedule A) + Precedence Graph

T_1	T_2	T_3	T_4	T_5
read(Y) read(Z)	read(X)			read(V) read(W) read(W)
	read(Y) write(Y)	write(Z)		
read(U)			read(Y) write(Y) read(Z) write(Z)	
read(U) write(U)				

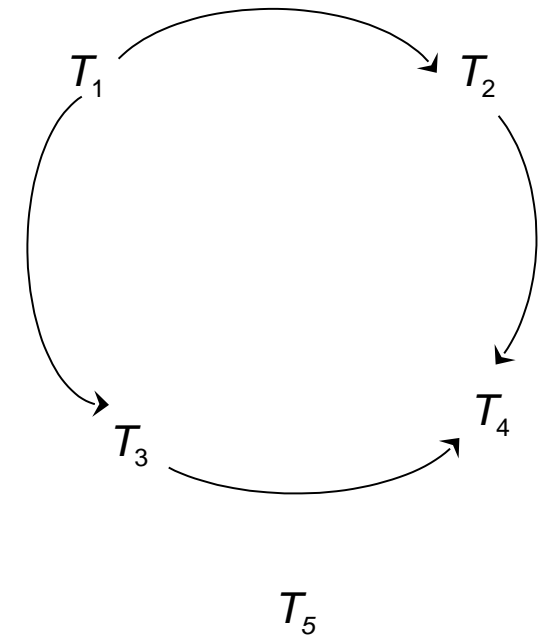

Test for Conflict Serializability

- A schedule is conflict serializable if and only if its precedence graph is acyclic.
- Cycle-detection algorithms exist which take order n^2 time, where n is the number of vertices in the graph.
 - (Better algorithms take order $n + e$ where e is the number of edges.)
- If precedence graph is acyclic, the serializability order can be obtained by a *topological sorting* of the graph.
 - This is a linear order consistent with the partial order of the graph.
 - For example, a serializability order for Schedule A would be
 $T_5 \rightarrow T_1 \rightarrow T_3 \rightarrow T_2 \rightarrow T_4$

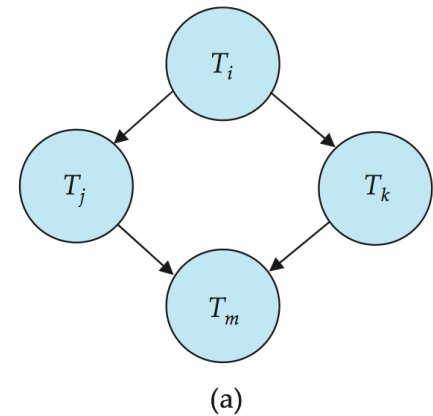

Test for View Serializability

- The precedence graph test for conflict serializability cannot be used directly to test for view serializability.
 - Extension to test for view serializability has cost exponential in the size of the precedence graph.
- The problem of checking if a schedule is view serializable falls in the class of *NP*-complete problems.
 - Thus existence of an efficient algorithm is *extremely* unlikely.
- However practical algorithms that just check some **sufficient conditions** for view serializability can still be used.

Recoverability

- Serializability is good for consistency
- But what if transactions fail ?
 - T2 has already committed
 - A user might have been notified
 - Now T1 abort creates a problem
 - T2 has seen its effect, so just aborting T1 is not enough. T2 must be aborted as well (and possibly restarted)
 - But T2 is *committed*

T1	T2
read(A) A = A -50 write(A)	read(A) tmp = A*0.1 A = A – tmp write(A) COMMIT
read(B) B=B+50 write(B) ABORT	

Recoverability

- Recoverable schedule: If T1 has read something T2 has written, T2 must commit before T1
 - Otherwise, if T1 commits, and T2 aborts, we have a problem
- Cascading rollbacks: If T10 aborts, T11 must abort, and hence T12 must abort and so on.

T_{10}	T_{11}	T_{12}
read(A) read(B) write(A)	read(A) write(A)	read(A)

Recoverability

- *Dirty read*: Reading a value written by a transaction that hasn't committed yet
- Cascadeless schedules:
 - A transaction only reads *committed* values.
 - So if T1 has written A, but not committed it, T2 can't read it.
 - *No dirty reads*
- Cascadeless → No cascading rollbacks
 - That's good
 - We will try to guarantee that as well

Recap

- We discussed:
 - Serial schedules, serializability
 - Conflict-serializability, view-serializability
 - How to check for conflict-serializability
 - Recoverability, cascade-less schedules
- We haven't discussed:
 - How to guarantee serializability ?
 - Allowing transactions to run, and then aborting them if the schedule wasn't serializable is clearly not the way to go
 - We instead use schemes to guarantee that the schedule will be conflict-serializable

Concurrency Control

- A database must provide a mechanism that will ensure that all possible schedules are
 - either conflict or view serializable, and
 - are recoverable and preferably cascadeless
- A policy in which only one transaction can execute at a time generates serial schedules, but provides a poor degree of concurrency
 - Are serial schedules recoverable/cascadeless?
- Testing a schedule for serializability *after* it has executed is a little too late!
- **Goal** – to develop concurrency control protocols that will assure serializability.

Concurrency Control vs. Serializability Tests

- Concurrency-control protocols allow concurrent schedules, but ensure that the schedules are conflict/view serializable, and are recoverable and cascadeless .
- Concurrency control protocols generally do not examine the precedence graph as it is being created
 - Instead a protocol imposes a discipline that avoids nonserializable schedules.
 - We study such protocols in Chapter 16.
- Different concurrency control protocols provide different tradeoffs between the amount of concurrency they allow and the amount of overhead that they incur.
- Tests for serializability help us understand why a concurrency control protocol is correct.

Weak Levels of Consistency

- Some applications are willing to live with weak levels of consistency, allowing schedules that are not serializable
 - E.g. a read-only transaction that wants to get an approximate total balance of all accounts
 - E.g. database statistics computed for query optimization can be approximate (why?)
 - Such transactions need not be serializable with respect to other transactions
- Tradeoff accuracy for performance

Levels of Consistency in SQL-92

- **Serializable** — default
- **Repeatable read** — only committed records to be read, repeated reads of same record must return same value. However, a transaction may not be serializable – it may find some records inserted by a transaction but not find others.
- **Read committed** — only committed records can be read, but successive reads of record may return different (but committed) values.
- **Read uncommitted** — even uncommitted records may be read.
 - Lower degrees of consistency useful for gathering approximate information about the database
 - Warning: some database systems do not ensure serializable schedules by default
 - E.g. Oracle and PostgreSQL by default support a level of consistency called snapshot isolation (not part of the SQL standard)

Transaction Definition in SQL

- Data manipulation language must include a construct for specifying the set of actions that comprise a transaction.
- In SQL, a transaction begins implicitly.
- A transaction in SQL ends by:
 - **Commit work** commits current transaction and begins a new one.
 - **Rollback work** causes current transaction to abort.
- In almost all database systems, by default, every SQL statement also commits implicitly if it executes successfully
 - Implicit commit can be turned off by a database directive
 - E.g. in JDBC, `connection.setAutoCommit(false);`